




Bren Technologies Inc. & Petro coating systems Ltd.
 61 Parr Blvd Unit #2 Bolton, ON L7E 4E3
 Tel 905 951 8118 ✦ Toll Free 866 438 6685
 Fax 905 951 8384

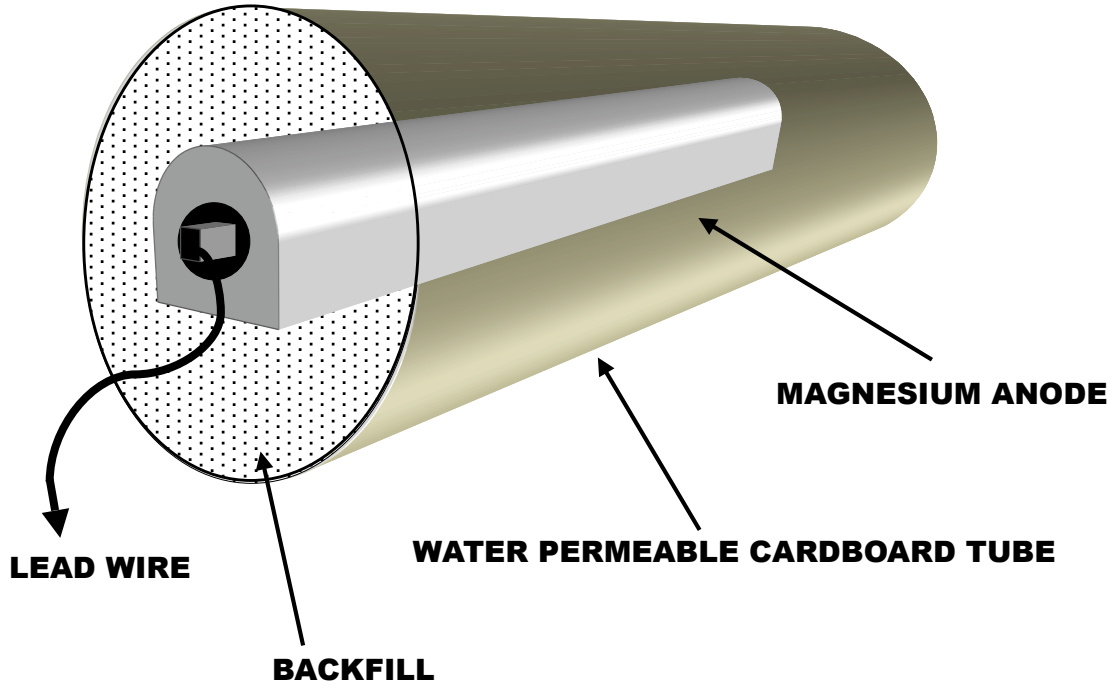

ALLOY SPECIFICATION: ASTM B843 (latest edition)

HIGH POTENTIAL MAGNESIUM ANODES

PRODUCT CODE	NET WEIGHT OF ANODE	APPROX. WEIGHT PACKAGED	STANDARD PACKAGING
MA-5	5 LBS	13.5 LBS	5" DIA X 12" WATER PERMEABLE CARDBOARD TUBE
MA-9	9 LBS	20 LBS	5" DIA X 18" WATER PERMEABLE CARDBOARD TUBE
MA-17	17 LBS	35 LBS	5" DIA X 30" WATER PERMEABLE CARDBOARD TUBE
MA-32	32 LBS	80 LBS	8" DIA X 27.5" WATER PERMEABLE CARDBOARD TUBE

CUSTOM PACKAGING UPON REQUEST

WIRE: STANDARD 10FT (3M) AWG #10 STRANDED COPPER LEAD WIRE WITH TW75 WHITE INSULATION, SILVER SOLDERED TO 1/4" DIA ELECTRO GALVANIZED STEEL CORE EXTENDING 75% OF ANODE LENGTH - CUSTOM WIRE SELECTION UPON REQUEST

BACKFILL: GROUND HYDRATED GYPSUM - 77% +/- 1% ; ANHYDROUS SODIUM SULPHATE - 8% +/- 1% ; POWDERED WYOMING BENTONITE - 15% +/- 1%